



Bucket elevator drives

斗式提升机用减速机



型号表示 主减速机型号/辅传减速机型号

Designation of Types Main gear unit type/Auxiliary gear motor type

例 Example: B3DH13-71-B-CW/KF107-Y18.5-28.59

主减速机型号说明 Explanation of main gear unit type

B 3 D H - 13 - 71 - B - CW 系列类型 传动级数 输出轴结构形式 安装方式 规格代号 公称传动比 装配布置形式 输入轴旋转方向		B 3 D H - 13 - 71 - B - CW type number of stages output shaft design mounting position size nominal ratio design rotate direction of input shaft	
型号说明	上例说明	Explanation of types	Explanation of the above example
系列类型: B 直交轴系列	直交轴系列	Types: B Bevel-helical	Bevel-helical
传动级数: 3 三级	三级传动	Number of stages: 3 3-stage	3-stage
输出轴结构形式: S 实心轴 H 空心轴 D 带胀紧盘空心轴	带胀紧盘 空心轴输出	Output shaft design: S Solid shaft H Hollow shaft D Hollow shaft for shrink disk	Hollow shaft for shrink disk output
安装方式: H 卧式带底脚	卧式带底脚安装	Mouting positions: H Horizontal	Horizontal
规格代号: 4~18	13机座号	Size: sizes 4~18	size 13
公称传动比: 公称传动比 i_N (见选型参数表)	公称传动比 $i_N=71$	Nominal ratio: Nominal ratio i_N (see selection table)	Nominal ratio $i_N=71$
装配布置形式: B、D (见320页)	装配布置形式为B	Design for assemble: B, D (see page 320)	Design B
输入轴旋转方向 (面向输入轴方向看): CW 顺时针 CCW 逆时针	输入轴为 顺时针方向	Direction of rotation of input shaft: (viewing on input shaft) CW Clockwise CCW Counter clockwise.	Direction of rotation of input shaft is clockwise

辅传减速机型号说明¹⁾ Explanation of anxiiliary gear motor type¹⁾

K F 107 - Y18.5 - 28.59 - M4 - A(B) 减速机类型 结构形式 机座号 电机 传动比 输出轴及输出法兰方向(见93页) 安装形式(见94页)		K F 107 - Y18.5 - 28.59 - M4 - A(B) Gear units type Structure Size Motor Ratio Position of output shaft and flange (see page 93) Mounting position (see page 94)	
型号说明	上例说明	Explanation of types	Explanation of the above example
减速机类型: 螺旋锥齿轮减速机	螺旋锥齿轮减速机	Gear units type: Helical-bevel gear motor	Helical-bevel gear motor
结构形式: F轴伸法兰式	轴伸法兰式	Structure: F Flange mounted solid output shaft	Flange-mounted solid shaft output
机座号: 37...167	107机座号	Size: 37...167	Size 107
电机: 电机功率	18.5kW普通电机	Motor: motor power	18.5kW Ordinary motor
传动比: 见307页	传动比: 28.59	Ratio: see page 307	Ratio: 28.59

注: 1)主减速机规格确定后, 依据辅传驱动为空载和载荷不同工作情况, 辅传减速机型号基本确定, 见307页。

Note: 1) Auxiliary gear motor type is basically determined depend on the auxiliary drive working under maintenance or under load condition after main gear unit has been selected (see page 307).



注意事项

务必遵循以下原则：

样本中的附图只属范例，并不要求严格一致。
所有尺寸可能改进。

所注重量仅为平均值，不要求严格一致。

为防止发生事故，所有旋转部件应按安全规定
加罩防护。

试车前，必须认真阅读操作说明。主减速机出
厂时未加注润滑油。因此应按规定加注润滑油。

给出的加油量只作为参考值，实际油量应以油
尺上的标记为准。

通常，辅传减速电机在出厂前已加注润滑油。

采用国产逆止器、超越离合器时，需给逆止器
和联接法兰之内的超越离合器加注润滑脂（2号
锂基润滑脂可满足要求），并定期更换。
采用国外逆止器、超越离合器时，需向联接法
兰内加注润滑油（采用与主减速机同样规格润
滑油）以润滑超越离合器，油位以略低于连接
法兰视孔即可。

B

有关外形尺寸图中的符号说明如下：



= 油 尺



= 通 气 孔



= 加 油 孔



= 放 油 孔

基础螺栓的性能等级为8.8级。

Attention

Following items are absolutely to be observed:

Illustrations are examples only and are not strictly
bonding. Dimensions are subject to change.

The weights are mean values and not strictly
binding.

To prevent accidents, all rotating parts should
be guarded according to local and national
safety regulations.

Prior to commissioning, the operating
instructions must be observed. The gear units
are delivered ready for operation but without
oil filling. So specified oil should be filled.

Oil quantities given are guide values only.
The exact quantity of oil depends on the marks
on the dipstick.

Normally, auxiliary gear motors are filled with
lubricant at the factory before dispatch.

If domestic backstop and overrunning clutch are used,
please lubricate them with grease (No. 2lithium grease
can meet requirement), and change periodically.
If imported backstop and overrunning clutch are used,
please fill lubrication into the connecting flange to lub-
ricate the overrunning clutch, as the backstop is lubri-
cated with splash oil.

Explanations of symbols used in the dimensioned
drawings:



= Oil dipstick



= Breather



= Oil filler



= Oil-out drain

Foundation bolts of min. property class 8.8.



选型指南

1. 确定减速机规格

1.1 计算传动比

$$i_s = \frac{n_1}{n_2}$$

1.2 确定减速机的额定功率，应满足(原动机为电机，每小时启动次数≤5次)

$$P_N \geq P_2 \times f_1 \times f_3$$

1.3 校核最大转矩，如峰值工作转矩，启动转矩或制动转矩，应满足(单向载荷，每小时峰值负荷次数≤5次)

$$P_N \geq \frac{T_A \times n_1}{9550} \times 0.5$$

根据 i_N 和 P_N 在额定功率表中确定减速机规格。

1.4 检查实际传动比 i 是否满足要求，实际传动比 i 见237页。

2. 确定润滑方式

减速机采用浸油飞溅润滑。
可按客户要求提供强制润滑。

3. 确定热功率 P_G

3.1 减速机不带辅助冷却装置，应满足

$$P_2 \leq P_G = P_{G1} \times f_6 \times f_7$$

3.2 减速机带冷却风扇装置时，应满足

$$P_2 \leq P_G = P_{G2} \times f_6 \times f_7$$

3.3 更高的热功率，可按要求提供外部油冷却器冷却。

Guidelines for the Selection

1. Determination of gear unit type and size

1.1 Find the transmission ratio

$$i_s = \frac{n_1}{n_2}$$

1.2 Determine nominal power rating of the gear unit (driven by electric motor, and start less than five times per hour)

$$P_N \geq P_2 \times f_1 \times f_3$$

1.3 Check for maximum torque, e.g. peak operating-, starting- or braking torque (unilateral loading, and endure peak load less than five times per hour)

$$P_N \geq \frac{T_A \times n_1}{9550} \times 0.5$$

Gear unit sizes are given in rating tables depending on i_N and P_N .

1.4 Check whether the actual ratio i as per tables on page 237 is acceptable.

2. Determination of oil supply

All parts to be lubricated are lying in the oil or are splash lubricated. Forced lubrication on request.

3. Determination of required thermal capacity P_G

3.1 Gear unit without auxiliary cooling sufficient, if

$$P_2 \leq P_G = P_{G1} \times f_6 \times f_7$$

3.2 Gear unit with fan sufficient, if

$$P_2 \leq P_G = P_{G2} \times f_6 \times f_7$$

3.3 For higher thermal capacities, cooling by external oil cooler on request.



符号表

E_D = 每小时工作周期, 以%表示, 例如 $E_D=80\%$

f_1 = 工作机系数 (表1), 见306页

f_3 = 减速机安全系数 (表3), 见306页

f_6 = 环境温度系数 (表6), 见306页

f_7 = 海拔高度系数 (表7), 见306页

i = 实际传动比

i_N = 额定传动比

i_s = 要求传动比

n_1 = 输入转速 (min^{-1})

n_2 = 输出转速 (min^{-1})

n_3 = 辅传驱动 (50Hz; $n_1=1500\text{min}^{-1}$) 输入时的主减速机 (B3) 输出轴上的输出转速 (min^{-1})

P_G = 需要的热功率

P_{G1} = 无辅助冷却装置时的热功率, 见309~311页

P_{G2} = 带冷却风扇装置时的热功率, 见309~311页

P_N = 减速机的额定功率 (kW), 见选型表308页

P_2 = 工作机的额定功率 (kW)

t = 环境温度 ($^{\circ}\text{C}$)

T_A = 输入轴最大扭矩, 例如峰值工作扭矩, 启动扭矩或制动扭矩 (Nm)

T_{2N} = 额定输出扭矩 (kNm), 见237页

T_3 = 辅传驱动输入时的主减速机 (B3) 输出轴上有输出转矩 (kNm), 见307页

Key to Symbols

E_D = Operation cycle per hour in %, e.g. $E_D=80\%$

f_1 = Factor for driven machine (table 1), page 306

f_3 = Safety factor (table 3), page 306

f_6 = Factor for ambient temperature (table 6), page 306

f_7 = Factor for ambient (table 7), page 306

i = Actual ratio

i_N = Nominal ratio

i_s = Required ratio

n_1 = Input speed (min^{-1})

n_2 = Output speed (min^{-1})

n_3 = Output speed (min^{-1}) on main gear unit output shaft (B3), in case of input via auxiliary drive (50Hz; $n_1 = 1500\text{min}^{-1}$)

P_G = Required thermal capacity

P_{G1} = Thermal capacity for gear units without auxiliary cooling, page 309~311

P_{G2} = Thermal capacity for gear units with fan cooling, page 309~311

P_N = Nominal power rating of gear unit (kW), see rating table at page 308

P_2 = Power rating of driven machine (kW)

t = Ambient temperature ($^{\circ}\text{C}$)

T_A = Max. torque occurring on input shaft, e.g. peak operating-, starting- or braking torque (Nm)

T_{2N} = Nominal output torque (kNm), page 237

T_3 = Output torque (kNm) on main gear unit output shaft (B3), in case of input via auxiliary drive, page 307



计算实例

已知条件:

原动机

电动机: $P_1=75\text{kW}$

电机转速: $n_1=1500\text{min}^{-1}$

最大起动扭矩: $T_A=720\text{Nm}$

工作机

斗式提升机: $P_2=62\text{kW}$

转速: $n_2=26\text{min}^{-1}$

日工作小时数: 12小时/天

每小时起动次数: 7

辅传驱动: 载荷驱动

每小时工作周期: $E_D=100\%$

环境温度: 30°C

室外安装: 风速 $\geq 4\text{m/s}$

海拔高度: 海平面

减速机类型

直交轴减速机

安装方式: 水平安装

输出轴: 右面

输出轴的旋转方向: CCW

要求:

选择减速机类型和规格

1. 选择减速机类型和规格

1.1 确定传动比

$$i_s = \frac{n_1}{n_2} = \frac{1500}{26} = 57.7 \quad i_N = 56$$

1.2 确定减速机额定功率

$$P_N \geq P_2 \times f_1 \times f_3 / \eta = 62 \times 1.5 \times 1.4 / 0.94 \\ = 138.5 \text{ kW}$$

从功率表中选择: 类型B3, 规格11, 额定

功率 $P_N=170\text{kW}$

带辅传驱动KF97-Y11-34.23,

$n_3=2.6\text{min}^{-1}$ 及 $T_3=36.9\text{kNm}$ 。

1.3 校核起动扭矩

$$P_N \geq \frac{T_A \times n_1}{9550} \times 0.5 = \frac{720 \times 1500}{9550} \times 0.5 \\ = 56.6 \text{ kW}$$

$$P_N = 170 \text{ kW} > 56.6 \text{ kW}$$

2. 确定热功率

2.1 按B3不带冷却装置时热功率计算:

$$P_G = P_{G1} \times f_6 \times f_7 = 88.9 \times 0.88 \times 1.0 = 78.23 \text{ kW}$$

$$P_2 = 62 \text{ kW} < P_G = 78.23 \text{ kW}$$

可选用不带冷却装置的减速机。

Calculation Example

Known criteria:

PRIME MOVER

Electric motor: $P_1=75\text{kW}$

Motor speed: $n_1=1500\text{min}^{-1}$

Max. starting torque: $T_A=720\text{Nm}$

DRIVEN MACHINE

Bucket elevator: $P_2=62\text{kW}$

Speed: $n_2=26\text{min}^{-1}$

Daily service hours: 12h/day

Starts per hour: 7

Auxiliary drive: operation under load

Operating cycle per hour: $E_D=100\%$

Ambient temperature: 30°C

Outdoor installation: wind velocity $\geq 4\text{m/s}$

Altitude: sea level

GEAR UNIT DESIGN

Bevel-helican gear unit

Mounting position: horizontal

Output shaft: right hand side

Rotate direction of of output shaft: CCW

Required

Type and size of gear unit

1. Selection of gear unit type and size

1.1 Calculation of transmission ratio

$$i_s = \frac{n_1}{n_2} = \frac{1500}{26} = 57.7 \quad i_N = 56$$

1.2 Determination of the gear unit nominal power rating

$$P_N \geq P_2 \times f_1 \times f_3 / \eta = 62 \times 1.5 \times 1.4 / 0.94 \\ = 138.5 \text{ kW}$$

Selected from power rating table: type B3,

gear unit size 11, with $P_N=170\text{kW}$

With auxiliary drive KF97-Y11-34.23,

$n_3=2.6\text{min}^{-1}$ and $T_3=36.9\text{kNm}$.

1.3 Checking the starting torque

$$P_N \geq \frac{T_A \times n_1}{9550} \times 0.5 = \frac{720 \times 1500}{9550} \times 0.5 \\ = 56.6 \text{ kW}$$

$$P_N = 170 \text{ kW} > 56.6 \text{ kW}$$

2. Determination of thermal capacity

2.1 Thermal capacity for gear units without auxiliary cooling, acc. to table for type B3

$$P_G = P_{G1} \times f_6 \times f_7 = 88.9 \times 0.88 \times 1.0 = 78.23 \text{ kW}$$

$$P_2 = 62 \text{ kW} < P_G = 78.23 \text{ kW}$$

A GEAR UNIT WITHOUT AUXILIARY COOLING IS SUFFICIENT!



服务系数

Service Factors

表1 工作机系数 f_1
Table 1 Factor for driven machine f_1

工作机 Driven machines	日工作小时数 Effective daily operating period under load in hours			工作机 Driven machines	日工作小时数 Effective daily operating period under load in hours		
	≤ 0.5	0.5~10	>10		≤ 0.5	0.5~10	>10
输送机** Conveyors**				货用电梯* Goods lifts*	-	1.2	1.5
斗式输出机 Bucket conveyors	-	1.4	1.5	客用电梯* Passenger lifts*	-	1.5	1.8
升降卷扬机 Hauling winches	1.4	1.6	1.6	刮板式输送机 Apron conveyors	-	1.2	1.5
提升机 Hoists	-	1.5	1.8	自动扶梯 Escalators	1.0	1.2	1.4
提式输送机 $\leq 150\text{kW}$ Belt conveyors $\leq 150\text{kW}$	1.0	1.2	1.3	轨道车辆 Railway Vehicles	-	1.5	-
带式输送机 $>150\text{kW}$ Belt conveyors $>150\text{kW}$	1.1	1.3	1.4				

注: *) 按最大扭矩确定额定功率;
**) 检验热功率是绝对有必要的。

Note: *) Designed power corresponding to max. torque;
**) A check for thermal capacity is absolutely essential.

表3 减速器安全系数 f_3 Table 3 Safety factor f_3

重要性与安全要求	一般设备, 减速器失效仅引起单机停产且易更换备件	重要设备, 减速器失效引起机组、生产线或全厂停产	高度安全要求, 减速器失效引起设备、人身事故
Importance and safety request	Ordinary equipment, malfunction only cause accident of single machine and easily replaced.	Important equipment, malfunction cause the accident of assembling unit, production-line or whole factory.	Safety request highly, malfunction cause the accident of equipment and personal injury.
f_3	1.25-1.3	1.3-1.5	>1.5

表6 环境温度系数 f_6 Table 6 Thermal factor f_6

不带辅助冷却装置或仅带冷却风扇 Without auxiliary cooling or with fan cooling					
环境温度 Ambient temperature	每小时工作周期 (ED) 百分比 Operating cycle per hour (ED) in %				
	100	80	60	40	20
10℃	1.11	1.31	1.60	2.14	3.64
20℃	1.00	1.18	1.44	1.93	3.28
30℃	0.88	1.04	1.27	1.70	2.89
40℃	0.75	0.89	1.08	1.45	2.46
50℃	0.63	0.74	0.91	1.22	2.07

表7 海拔高度系数 f_7 Table 7 Factor for altitude f_7

不带辅助冷却装置或仅带冷却风扇 Without auxiliary cooling or with fan cooling					
系数 Factor	海拔高度 (m) Altitude (meters)				
	高达 Up to 1000	高达 Up to 2000	高达 Up to 3000	高达 Up to 4000	高达 Up to 5000
f_7	1.0	0.95	0.90	0.85	0.80



辅传驱动

类型B3...

规格4...18

依据不同的使用要求，每种规格的减速机有两种辅传驱动型式：

1) 空载驱动

斗式提升机空载(空斗)时，辅传减速机驱动斗式提升机以较低转速同向转动。

2) 载荷驱动

斗式提升机满载(满斗)时，辅传减速机驱动斗式提升机发较低转速同向转动。

辅传驱动结构设计

辅传减速机为KF系列带直联电机的锥齿轮减速电机，通过中间法兰与主减速机相联接，超越离合器与主减速机相连实现自动离合。超越离合器在中间法兰内部，有独立油润滑和加润滑脂润滑两种方式。KF锥齿轮减速电机也为独立油润滑方式，出厂前已加注润滑油。

Auxiliary Drive

Types B3...

Sizes 4...18

Dependent on the case of application, for each gear unit size two different auxiliary drives are available:

1) Maintenance Drive

The motor of the auxiliary drive is dimensioned in such a way that the bucket elevator can be operated with empty buckets at low speed in the same direction of rotation.

2) Operation under load

The motor of the auxiliary drive is dimensioned in such a way that the bucket elevator can be operated with full buckets at low speed in the same direction of rotation.

Design of auxiliary drives

The auxiliary drive is a bevel-helical gear motor type KF, which is flanged to the main gear unit by means of an intermediate flange and is coupled to the main gear units via an overrunning clutch. The overrunning clutch is located in the intermediate flange, and lubricated with its own oil or grease. The bevel-helical gear motor type KF has an own oil filling and is supplied filled with oil.

主减速机 Main gear Unit	空载驱动 Maintenance drive						载荷驱动 Operation under load					
	1) n_3 [min ⁻¹]	1) T_3 [kNm]	2) 齿轮减速电机 Geared motor	P_M [kW]	输出轴 $d \times l$ [mm]	i	1) n_3 [min ⁻¹]	1) T_3 [kNm]	2) 齿轮减速电机 Geared motor	P_M [kW]	输出轴 $d \times l$ [mm]	i
4	2.5	2.7	KF47-Y0.75-35.39	0.75	30×60	35.39	2.5	3.9	KF57-Y1.1-35.7	1.1	35×70	35.7
5	2.5	5.3	KF57-Y1.5-35.7	1.5	35×70	35.7	3.3	6.5	KF67-Y2.2-27.28	2.2	40×80	27.28
6	2.0	6.6	KF57-Y1.5-35.7	1.5	35×70	35.7	2.7	8.1	KF67-Y2.2-27.28	2.2	40×80	27.28
7	3.0	6.6	KF67-Y2.2-30.22	2.2	40×80	30.22	3.1	11.5	KF77-Y4-29.27	4	50×100	29.27
8	2.4	8.3	KF67-Y2.2-30.22	2.2	40×80	30.22	2.5	14.5	KF77-Y4-29.27	4	50×100	29.27
9	2.9	9.4	KF77-Y3-30.89	3.0	50×100	30.89	2.5	20.0	KF87-Y5.5-36.52	5.5	60×120	36.52
10	2.3	11.7	KF77-Y3-30.89	3.0	50×100	30.89	2.0	25.1	KF87-Y5.5-36.52	5.5	60×120	36.52
11	2.3	11.8	KF77-Y3-40.04	3.0	50×100	40.04	2.7	36.0	KF97-Y11-34.23	11	70×140	34.23
12	1.8	15.0	KF77-Y3-40.04	3.0	50×100	40.04	2.2	45.8	KF97-Y11-34.23	11	70×140	34.23
13	2.1	17.3	KF87-Y4-44.02	4.0	60×120	44.02	3.3	51.0	KF107-Y18.5-28.59	18.5	90×170	28.59
14	1.7	21.7	KF87-Y4-44.02	4.0	60×120	44.02	2.6	63.9	KF107-Y18.5-28.59	18.5	90×170	28.59
15	2.1	16.9	KF87-Y4-44.02	4.0	60×120	44.02	3.5	78.0	KF127-Y30-27.67	30	110×210	27.67
16	1.9	19.2	KF87-Y4-44.02	4.0	60×120	44.02	3.0	88.5	KF127-Y30-27.67	30	110×210	27.67
17	2.1	17.2	KF87-Y4-44.02	4.0	60×120	44.02	3.4	97.5	KF127-Y37-27.67	37	110×210	27.67
18	1.8	20.0	KF87-Y4-44.02	4.0	60×120	44.02	2.9	113.2	KF127-Y37-27.67	37	110×210	27.67
减速机布置形式 Design of gear units												
主减速机B布置形式：D Design of main gear unit B: D 齿轮减速电机KF输出轴方向：A Output shaft direction of gear motor KF: A						主减速机B布置形式：B Design of main gear unit B: B 齿轮减速电机KF输出轴方向：B Output shaft direction of gear motor KF: B						

注：1) 辅传驱动输入时主减速机输出轴上转速、转矩（50Hz， $n_1=1500\text{min}^{-1}$ ）；

2) 齿轮减速电机KF规格。

Note: 1) Output speed and torque on main gear unit output shaft in case of input via auxiliary drive (50Hz, $n_1=1500\text{min}^{-1}$);

2) Gear motor KF size.



直交轴减速器

额定功率

类型 B3...

规格 4...18

Bevel-helical gear units

Nom.power ratings

Type B3...

Sizes 4...18

i_N	n_1 r/min	n_2 r/min	额定功率 P_N								Nominal power ratings P_N							
			规格								Sizes							
			4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	kW
25	1500	60	41	69	91	129	160	214	270	377	471	553	685	961	1087	1257	1508	
	1000	40	28	46	61	86	107	142	180	251	314	369	457	641	725	838	1005	
	750	30	21	35	46	64	80	107	135	188	236	276	342	481	543	628	754	
28	1500	54	37	62	82	116	144	192	243	339	424	498	616	865	978	1131	1357	
	1000	36	25	41	55	77	96	128	162	226	283	332	411	577	652	754	905	
	750	27	19	31	41	58	72	96	122	170	212	249	308	433	489	565	679	
31.5	1500	48	33	55	73	103	128	171	216	302	377	442	548	769	870	1005	1206	
	1000	32	22	37	49	69	85	114	144	201	251	295	365	513	580	670	804	
	750	24	17	28	36	52	64	85	108	151	188	221	274	385	435	503	603	
35.5	1500	42	29	48	64	90	112	150	189	264	330	387	479	673	761	880	1055	
	1000	28	19	32	43	60	75	100	126	176	220	258	320	449	507	586	704	
	750	21	15	24	32	45	56	75	95	132	165	194	240	336	380	440	528	
40	1500	38	26	44	58	82	101	135	171	239	298	350	434	609	688	796	955	
	1000	25	17	29	38	54	67	89	113	157	196	230	285	401	453	524	628	
	750	18.8	13	22	29	40	50	67	85	118	148	173	215	301	341	394	472	
45	1500	33	23	38	50	71	88	117	149	207	259	304	377	529	598	691	829	
	1000	22	15	25	33	47	59	78	99	138	173	203	251	352	399	461	553	
	750	16.7	12	19	25	36	45	59	75	105	131	154	191	268	303	350	420	
50	1500	30	21	35	46	64	80	107	135	188	236	276	342	481	543	628	754	
	1000	20	14	23	30	43	53	71	90	126	157	184	228	320	362	419	503	
	750	15	10.4	17	23	32	40	53	68	94	118	138	171	240	272	314	377	
56	1500	27	19	31	41	58	72	96	122	170	212	249	308	433	489	565	679	
	1000	17.9	12	21	27	38	48	64	81	112	141	165	204	287	324	375	450	
	750	13.4	9.3	15	20	29	36	48	60	84	105	123	153	215	243	281	337	
63	1500	24	17	28	36	50	64	85	108	151	188	221	274	385	435	503	603	
	1000	15.9	11	18	24	33	42	57	72	100	125	147	181	255	288	333	400	
	750	11.9	8.2	14	18	25	32	42	54	75	93	110	136	191	216	249	299	
71	1500	21	14.5	24	32	44	56	75	95	132	165	194	240	336	380	440	528	
	1000	14.1	9.7	16	21	30	38	50	63	89	111	130	161	226	255	295	354	
	750	10.6	7.3	12	16	22	28	38	48	67	83	98	121	170	192	222	266	

B

☐ 卧式安装减速机要求强制润滑

☐ Forced lubrication required on horizontal gear units



直交轴减速器

热功率

类型 B3...

规格 4...18

$n_1=750\text{min}^{-1}$

Bevel-helical gear units

Thermal capacities

Type B3...

Sizes 4...18

$n_1=750\text{min}^{-1}$

热功率P _G								Thermal capacities P _G								kW	
i _N	热功率取决于冷却方式：P _{G1} : 无辅助冷却装置；P _{G2} : 带冷却风扇 Thermal capacity dependent on kind of cooling:P _{G1} :without auxiliary cooling;P _{G2} :fan cooling;																
		规 格								Sizes							
		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
25	P _{G1}	28.1	39.4	45.9	61.7	71.2	83.7	90.9	115	144	151	179	216	237	254	276	
	P _{G2}	43.6	63.9	73.5	100	114	141	151	213	264	282	335	402	443	526	574	
28	P _{G1}	27	38.1	45.1	58.6	68.8	79.8	88.5	109	137	144	172	211	224	252	264	
	P _{G2}	41.7	61.4	72.2	94.8	110	133	147	202	251	266	318	389	412	513	536	
31.5	P _{G1}	25.5	36.1	42.6	55.6	66.3	76.3	84.6	104	129	136	163	198	219	238	260	
	P _{G2}	39.5	58	68.1	89.8	106	126	140	191	235	252	298	362	401	479	523	
35.5	P _{G1}	24	34	41.1	52.8	63	72.5	80.6	100	123	132	155	191	205	231	247	
	P _{G2}	36.9	54.3	65.4	84.8	100	120	132	182	222	241	283	348	372	460	488	
40	P _{G1}	21	29.5	39	46.2	60.1	67.8	76.9	94.9	117	124	148	181	198	221	239	
	P _{G2}	32.1	46.8	61.9	73.6	95.4	111	126	170	209	227	267	327	358	434	469	
45	P _{G1}	20.5	28.7	36.6	44.9	57	62.3	73	87	112	114	141	168	187	205	228	
	P _{G2}	31.3	45.6	57.8	71	90	101	119	156	200	207	256	300	336	401	444	
50	P _{G1}	20.7	28.6	31.9	44.2	49.9	61.2	68.3	87	106	116	134	172	173	213	211	
	P _{G2}	31.5	45	50.1	69.6	78.1	98.8	111	153	187	207	240	302	309	407	409	
56	P _{G1}	19.1	26.3	31.1	41	48.4	56.5	63	79.1	97.4	107	123	157	177	197	220	
	P _{G2}	28.9	41.5	48.7	64.7	75.6	91.4	101	139	171	189	218	275	310	372	414	
63	P _{G1}	18.3	25.3	30.9	39.7	47.8	54.5	61.8	76.3	96.6	103	125	150	162	189	202	
	P _{G2}	27.9	39.9	48.1	62.4	74.3	88.2	98.8	133	168	181	219	262	282	355	379	
71	P _{G1}	17	24.1	28.5	37.8	44.3	51	57.3	70.6	88.6	96	115	143	155	178	194	
	P _{G2}	25.9	37.9	44.3	59.5	68.9	82.5	91.7	123	152	169	199	247	269	333	361	

注: 表中数值按:
每小时工作周期: 100%
在室内大空间安装*
海拔高度至1000m

Note: Values refer to:
Operating cycle: 100%
Installation in a large hall*
Altitude up to 1000m

*)室内小空间 (风速 $< 1.4 \text{ m/s}$) 和室外 (风速 $\geq 4 \text{ m/s}$), 请垂询。

*)Calculation consult us when small confined space(wind velocity $< 1.4 \text{ m/s}$) or in the open (wind velocity $\geq 4 \text{ m/s}$)



直交轴减速器

热功率

类型 B3...

规格 4...18

 $n_1=1000\text{min}^{-1}$

Bevel-helical gear units

Thermal capacities

Type B3...

Sizes 4...18

 $n_1=1000\text{min}^{-1}$

热功率P _G								Thermal capacities P _G								kW	
i _N	热功率取决于冷却方式：P _{G1} : 无辅助冷却装置；P _{G2} : 带冷却风扇 Thermal capacity dependent on kind of cooling:P _{G1} :without auxiliary cooling;P _{G2} :fan cooling;																
		规 格								Sizes							
		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
25	P _{G1}	30.1	41.8	48.6	65	74.7	87.3	94.3	117	144	149	176	204	222	234	250	
	P _{G2}	51.7	75.5	86.9	119	134	166	178	250	309	329	390	466	513	607	661	
28	P _{G1}	29	40.6	48	62.1	72.7	83.9	92.7	113	140	144	172	205	216	239	248	
	P _{G2}	49.4	72.7	85.5	112	130	157	174	238	295	312	373	453	480	596	621	
31.5	P _{G1}	27.5	38.6	45.5	59.2	70.3	80.6	89.1	108	133	139	165	196	215	232	250	
	P _{G2}	46.8	68.7	80.6	106	125	149	165	225	276	296	350	423	468	557	608	
35.5	P _{G1}	25.9	36.4	44	56.4	67	76.9	85.3	105	128	135	159	192	205	228	241	
	P _{G2}	43.8	64.3	77.5	100	119	141	156	215	262	284	332	407	435	538	569	
40	P _{G1}	22.6	31.7	41.8	49.4	64.1	72.1	81.6	99.6	122	128	152	183	199	220	236	
	P _{G2}	38.1	55.5	73.3	87.1	112	131	149	201	246	267	315	383	419	508	548	
45	P _{G1}	22.1	30.9	39.3	48	60.9	66.4	77.7	91.6	117	119	147	171	190	206	228	
	P _{G2}	37.2	54	68.5	84.1	106	120	140	184	236	244	301	352	395	470	520	
50	P _{G1}	22.4	30.8	34.4	47.6	53.6	65.5	73.1	92.4	112	122	141	178	179	219	216	
	P _{G2}	37.4	53.3	59.4	82.5	92.5	117	131	181	221	244	283	356	363	478	481	
56	P _{G1}	20.7	28.5	33.6	44.3	52.1	60.7	67.7	84.5	103	113	131	165	186	205	228	
	P _{G2}	34.4	49.3	57.8	76.7	89.6	108	120	164	203	223	258	325	365	438	488	
63	P _{G1}	19.9	27.4	33.4	42.8	51.5	58.7	66.5	81.7	103	109	133	159	171	198	211	
	P _{G2}	33.1	47.3	57.1	74.1	88.1	104	117	158	198	214	259	309	333	419	447	
71	P _{G1}	18.4	26.1	30.8	40.8	47.8	55	61.7	75.7	94.8	103	122	151	164	187	204	
	P _{G2}	30.7	44.9	52.6	70.5	81.7	97.8	108	146	180	201	236	292	318	393	426	

注: 表中数值按:
每小时工作周期: 100%
在室内大空间安装*
海拔高度至1000m

Note: Values refer to:
Operating cycle: 100%
Installation in a large hall*
Altitude up to 1000m

*)室内小空间 (风速 $< 1.4 \text{ m/s}$) 和室外 (风速 $\geq 4 \text{ m/s}$), 请垂询。

*)Calculation consult us when small confined space(wind velocity $< 1.4 \text{ m/s}$) or in the open (wind velocity $\geq 4 \text{ m/s}$)



直交轴减速器

热功率

类型 B3...

规格 4...18

$n_1=1500\text{min}^{-1}$

Bevel-helical gear units

Thermal capacities

Type B3...

Sizes 4...18

$n_1=1500\text{min}^{-1}$

热功率P _G								Thermal capacities P _G								kW	
i _N	热功率取决于冷却方式：P _{G1} : 无辅助冷却装置；P _{G2} : 带冷却风扇 Thermal capacity dependent on kind of cooling:P _{G1} :without auxiliary cooling;P _{G2} :fan cooling;																
		规 格								Sizes							
		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
25	P _{G1}	31.9	43.3	50.1	66.2	75.2	86.9	92.8	109	130	128	150	153	160			
	P _{G2}	66.7	96.6	110	151	170	209	223	307	375	395	466	537	585	681	732	
28	P _{G1}	30.9	42.5	50	64.1	74.4	85	93.1	109	131	131	155	168	172	183	182	
	P _{G2}	63.9	93.3	109	143	165	199	220	296	363	380	452	535	562	689	711	
31.5	P _{G1}	29.4	40.7	47.8	61.7	72.7	82.7	90.7	106	129	131	154	170	183	190	199	
	P _{G2}	60.7	88.5	103	136	160	190	210	282	344	365	430	508	558	658	712	
35.5	P _{G1}	27.8	38.6	46.4	59.1	69.8	79.6	87.7	105	125	130	151	173	181	196	203	
	P _{G2}	56.8	83	99.8	129	152	181	199	271	328	353	412	495	526	644	677	
40	P _{G1}	24.3	33.7	44.3	52	67.1	75	84.4	100	121	125	147	168	180	194	204	
	P _{G2}	49.4	71.6	94.6	112	144	168	191	255	310	334	392	469	510	614	657	
45	P _{G1}	23.8	32.9	41.8	50.8	64	69.4	80.8	93.2	118	117	144	160	176	187	203	
	P _{G2}	48.3	69.8	88.5	108	137	154	180	234	298	306	377	434	484	572	629	
50	P _{G1}	24.2	33	36.8	50.7	56.9	69.3	77	95.8	115	124	142	174	174	210	204	
	P _{G2}	48.7	69.2	76.9	106	119	151	169	232	281	310	358	445	453	593	594	
56	P _{G1}	22.4	30.7	36.2	47.5	55.7	64.8	72	88.9	108	117	135	167	186	203	225	
	P _{G2}	44.8	64	75.1	99.5	116	140	155	211	260	285	330	411	461	552	612	
63	P _{G1}	21.6	29.5	36	46.1	55.2	62.8	71	86.3	108	114	138	162	173	199	211	
	P _{G2}	43.2	61.6	74.2	96.2	114	135	151	203	255	275	332	393	422	529	563	
71	P _{G1}	20	28.2	33.3	43.9	51.4	59	65.9	80.2	99.9	107	127	155	167	190	205	
	P _{G2}	40	58.5	68.4	91.7	106	126	140	189	232	258	302	372	404	498	539	

注: 表中数值按:
每小时工作周期: 100%
在室内大空间安装*
海拔高度至1000m

Note: Values refer to:
Operating cycle: 100%
Installation in a large hall*
Altitude up to 1000m


*)室内小空间 (风速 $< 1.4 \text{ m/s}$) 和室外 (风速 $\geq 4 \text{ m/s}$), 请垂询。

*)Caculation consult us when small confined space(wind velocity $< 1.4 \text{ m/s}$) or in the open (wind velocity $\geq 4 \text{ m/s}$)



直交轴减速机 Bevel-helical Gear Units
带辅传 With Auxiliary Drive
空载驱动 Maintenance Drive

三级 Three Stage
类型 Type B3...
规格 Sizes 4...12

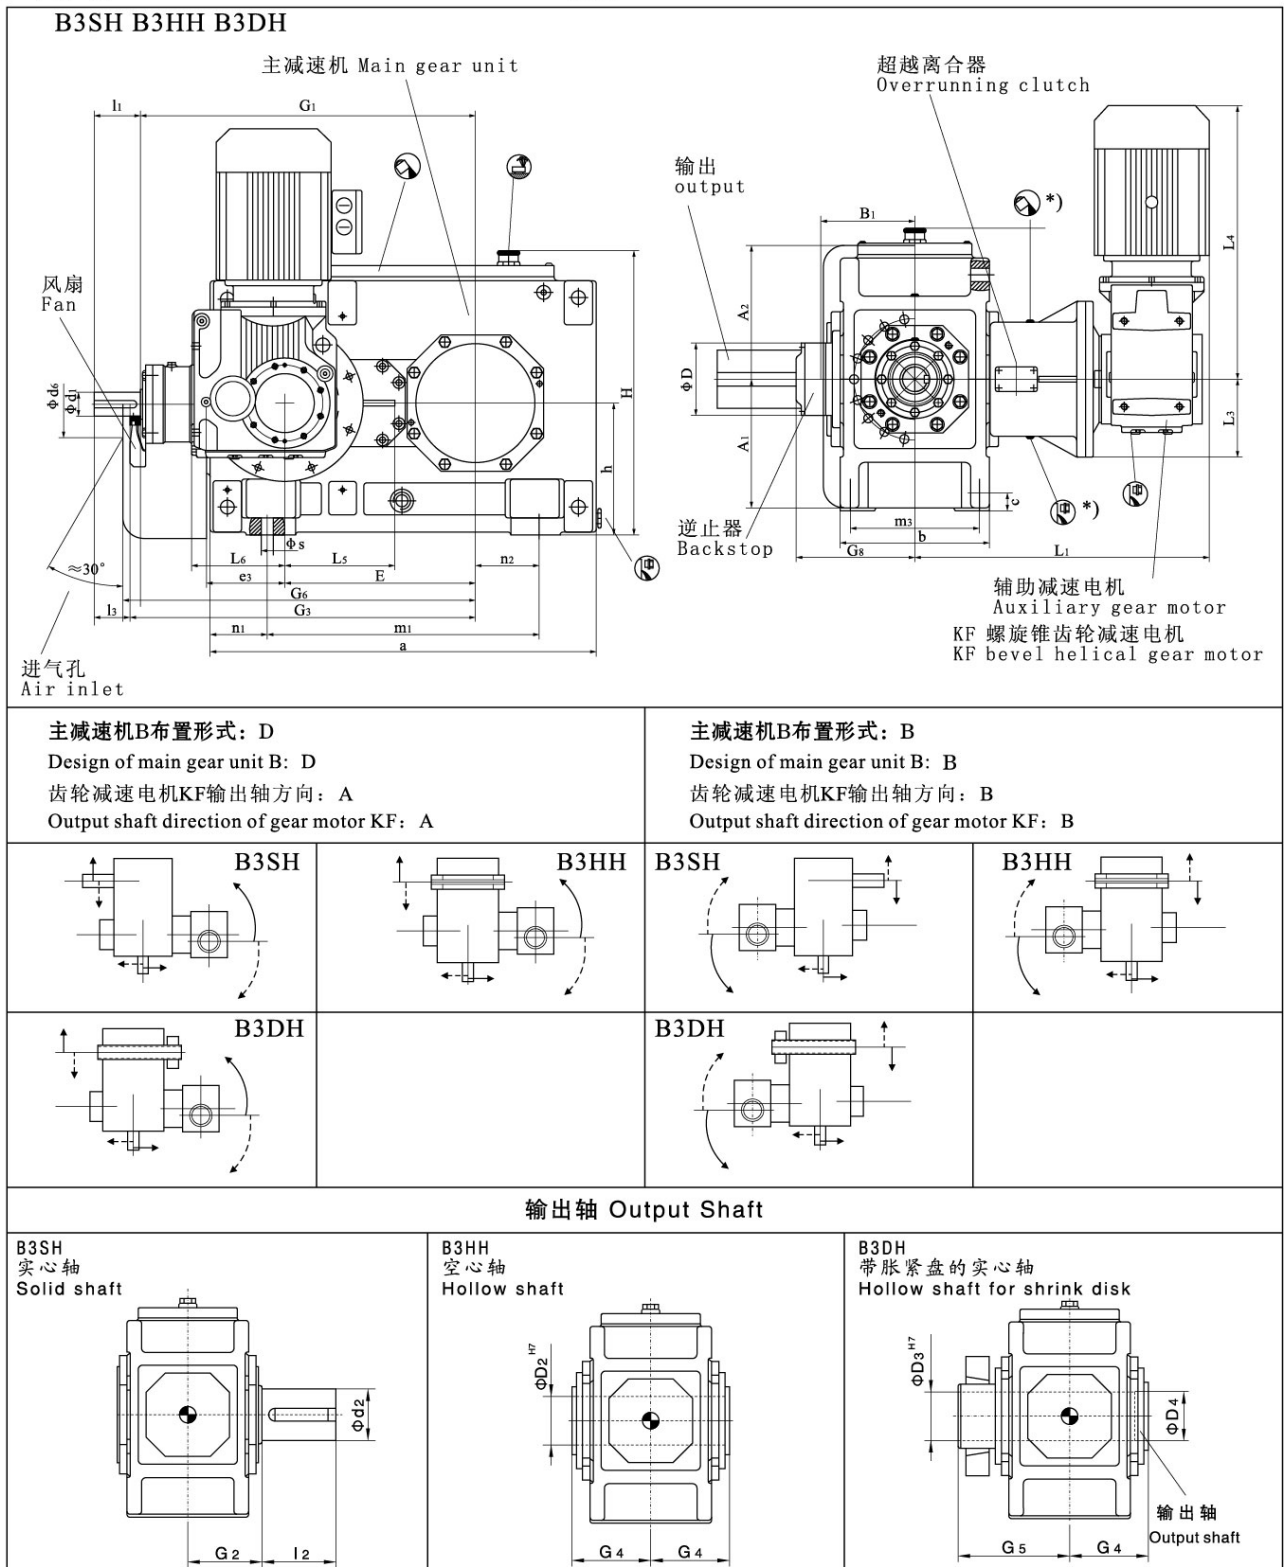



直交轴减速机 Bevel-helical Gear Units
带辅传 With Auxiliary Drive
空载驱动 Maintenance Drive

三级Three Stage
类型Type B3...
规格Sizes 4...12

规格 Size	辅传减速机 Auxiliary gear motor	尺寸 mm Input shaft												Dimensions in mm	
		$i_N=25-45$			$i_N=25-56$			$i_N=50-71$			$i_N=63-71$			G_1	G_3
		d_1	l_1	l_3	d_1	l_1	l_3	d_1	l_1	l_3	d_1	l_1	l_3		
4	KF47-Y0.75-35.39	35	70	50				30	60	40				500	520
5	KF57-Y1.5-35.7	45	80	60				35	60	40				575	595
6	KF57-Y1.5-35.7				45	80	60				35	60	40	610	630
7	KF67-Y2.2-30.22	50	100	80				40	80	60				690	710
8	KF67-Y2.2-30.22				50	100	80				40	80	60	735	755
9	KF77-Y3-30.89	60	110	80				50	100	70				800	830
10	KF77-Y3-30.89				60	110	80				50	100	70	850	880
11	KF77-Y3-40.04	75	135	105				60	110	80				960	990
12	KF77-Y3-40.04				75	135	105				60	110	80	1030	1060

规格 Size	尺寸 mm Gear units													Dimensions in mm	
	a	A_1	A_2	b	B_1	c	d_6	e_3	E	G_6	G_8	h	H	G_1	G_3
4	565	195	200	215	143	28	110	110	270	530	193	200	445		
5	640	220	235	255	168	28	130	130	315	605	225	230	512		
6	720	220	235	255	168	28	130	130	350	640	225	230	512		
7	785	275	275	300	193	35	165	160	385	720	273	280	602		
8	890	275	275	300	193	35	165	160	430	765	273	280	617		
9	925	315	325	370	231	40	175	185	450	845	327	320	697		
10	1025	315	325	370	231	40	175	185	500	895	327	320	697		
11	1105	370	385	430	263	50	190	225	545	1010	342	370	817		
12	1260	370	385	430	263	50	190	225	615	1080	342	370	825		

规格 Size	尺寸 mm				Dimensions in mm						
	m ₁	m ₃	n ₁	n ₂	s	L ₁	L ₃	L ₄	L ₅	L ₆	D
4	355	180	105	85	19	447	103	459	137	112	132
5	430	220	105	100	19	517	125	515	165	132	150
6	510	220	105	145	19	517	125	515	165	132	150
7	545	260	120	130	24	560	150	536	210	140	175
8	650	260	120	190	24	560	150	536	210	140	175
9	635	320	145	155	28	655	160	556	255	180	190
10	735	320	145	205	28	655	160	556	255	180	190
11	775	370	165	180	35	702	180	556	315	180	245
12	930	370	165	265	35	702	180	556	315	180	245

规格 Size	尺寸 mm 轴			Dimensions in mm Output shaft						润滑油 lubrication		重量 weight	
	B3SH			B3HH		B3DH				KF	B3	KF ¹⁾	B3/KF ²⁾
	d ₂	G ₂	l ₂	D ₂	G ₄	D ₃	D ₄	G ₄	G ₅	(L)	(L)	(kg)	(kg)
4	80	140	170	80	140	85	85	140	205	2.2	10	36	262
5	100	165	210	95	165	100	100	165	240	3	16	52	402
6	110	165	210	105	165	110	110	165	240	3	17	52	457
7	120	195	210	115	195	120	120	195	280	3.6	30	66	649
8	130	195	250	125	195	130	130	195	285	3.6	33	66	734
9	140	235	250	135	235	140	140	235	330	6	45	92	1017
10	160	235	300	150	235	150	150	235	350	6	48	92	1147
11	170	270	300	165	270	165	165	270	400	6	79	92	1582
12	180	270	300	180	270	180	180	270	405	6	84	92	1857

1) KF减速机重量（不含润滑油重量），其余相关数据详见94页；

2) 主减速机与辅传减速机组合总重量（不含润滑油重量）；


1) Weight of gear motor KF (oil weight not included), other detailed data refer to Page 94;

2) Gross weight of combination of main gear unit and auxiliary gear motor (oil weight not included).



三级 Three Stage
类型 Type B3...
规格 Sizes 13...18

B3SH B3HH B3DH

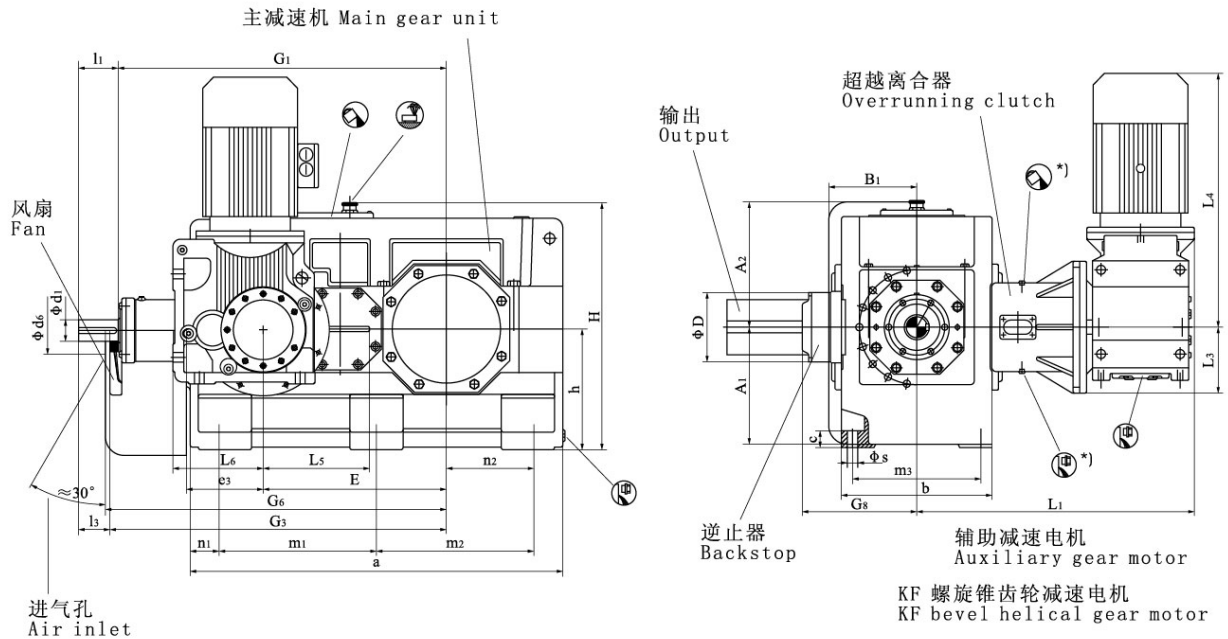

主减速机B布置形式：D

Design of main gear unit B: D

齿轮减速电机KF输出轴方向：A







Output shaft direction of gear motor KF: A

主减速机B布置形式：B

Design of main gear unit B: B


齿轮减速电机KF输出轴方向：B

Output shaft direction of gear motor KF: B




输出轴 Output Shaft


B3SH 实心轴 Solid shaft	
----------------------------	--



B3HH
空心轴
Hollow shaft



B3DH	带胀紧盘的实心轴	Hollow shaft for shrink disk
------	----------	------------------------------

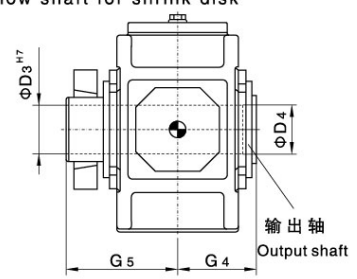



直交轴减速机 Bevel-helical Gear Units
带辅传 With Auxiliary Drive
空载驱动 Maintenance Drive

三级Three Stage
类型Type B3...
规格Sizes 13...18

规格 Size	辅传减速电机 Auxiliary gear motor	尺 寸 mm 输 入 轴 Dimensions in mm Input shaft																			
		i _N =25-45			i _N =25-50			i _N =25-56			i _N =50-71			i _N =56-71			i _N =63-71			G ₁	G ₃
		d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃		
13	KF87-Y4-44.02	85	165	130							70	140	105							1125	1160
14	KF87-Y4-44.02							85	165	130							70	140	105	1195	1230
15	KF87-Y4-44.02	95	165	130							75	140	105							1367	1402
16	KF87-Y4-44.02				95	165	130							75	140	105				1413	1448
17	KF87-Y4-44.02	115	205	165							90	170	130							1560	1600
18	KF87-Y4-44.02				115	205	165							90	170	130				1620	1660

规格 Size	尺 寸 mm 减 速 器 Dimensions in mm Gear units												
	a	A ₁	A ₂	b	B ₁	c	d ₆	e ₃	E	G ₆	G ₈	h	H
13	1290	425	435	550	325	60	210	265	635	1180	453	440	935
14	1430	425	435	550	325	60	210	265	705	1250	453	440	935
15	1550	485	520	625	365	70	210	320	762	1420	500	500	1035
16	1640	485	520	625	365	70	210	320	808	1470	500	500	1035
17	1740	535	570	690	395	80	230	370	860	1620	532	550	1145
18	1860	535	570	690	395	80	230	370	920	1680	532	550	1145

规格 Size	尺寸 mm Gear units											
	m ₁	m ₂	m ₃	n ₁	n ₂	s	L ₁	L ₃	L ₄	L ₅	L ₆	D
13	545	545	475	100	305	35	805	190	628	362	212	290
14	545	685	475	100	375	35	805	190	628	362	212	290
15	655	655	535	120	365	42	850	200	628	443	212	310
16	655	745	535	120	410	42	850	200	628	443	212	310
17	735	735	600	135	390	42	882	225	628	520	212	400
18	735	855	600	135	450	42	882	225	628	520	212	400


规格 Size	尺 寸 mm 输 出 轴 Dimensions in mm Output shaft									润滑油 lubrication		重量 weight	
	B3SH			B3HH		B3DH				KF	B3	KF ¹⁾	B3/KF ²⁾
	d ₂	G ₂	l ₂	D ₂	G ₄	D ₃	D ₄	G ₄	G ₅	(L)	(L)	(kg)	(kg)
13	200	335	350	190	335	190	190	335	480	11.9	145	126	2696
14	210	335	350	210	335	210	210	335	480	11.9	155	126	3046
15	230	380	410	230	380	230	230	380	550	11.9	230	126	4111
16	240	380	410	240	380	240	240	380	550	11.9	240	126	4366
17	250	415	410	250	415	250	250	415	600	11.9	315	126	5576
18	270	415	470	275	415	280	280	415	600	11.9	325	126	6026

1) KF减速机重量 (不含润滑油重量), 其余相关数据详见94页;

2) 主减速机与辅传减速机组合总重量 (不含润滑油重量);

1) Weight of gear motor KF (oil weight not included), other detailed data refer to Page 94;

2) Gross weight of combination of main gear unit and auxiliary gear motor (oil weight not included).



三级 Three Stage
类型 Type B3...
规格 Sizes 4...12





直交轴减速机 Bevel-helical Gear Units
带辅传 With Auxiliary Drive
载荷驱动 Operation Under Load

三级Three Stage
类型Type B3...
规格Sizes 4...12

规格 Size	辅传减速机 Auxiliary gear motor	尺寸 mm Input shaft												Dimensions in mm	
		$i_N=25-45$			$i_N=25-56$			$i_N=50-71$			$i_N=63-71$			G_1	G_3
		d_1	l_1	l_3	d_1	l_1	l_3	d_1	l_1	l_3	d_1	l_1	l_3		
4	KF57-Y1.1-35.7	35	70	50				30	60	40				500	520
5	KF67-Y2.2-27.28	45	80	60				35	60	40				575	595
6	KF67-Y2.2-27.28				45	80	60				35	60	40	610	630
7	KF77-Y4-29.27	50	100	80				40	80	60				690	710
8	KF77-Y4-29.27				50	100	80				40	80	60	735	755
9	KF87-Y5.5-36.52	60	110	80				50	100	70				800	830
10	KF87-Y5.5-36.52				60	110	80				50	100	70	850	880
11	KF97-Y11-34.23	75	135	105				60	110	80				960	990
12	KF97-Y11-34.23				75	135	105				60	110	80	1030	1060

规格 Size	尺寸 mm Gear units													Dimensions in mm	
	a	A_1	A_2	b	B_1	c	d_6	e_3	E	G_6	G_8	h	H		
4	565	195	200	215	143	28	110	110	270	530	193	200	445		
5	640	220	235	255	168	28	130	130	315	605	225	230	512		
6	720	220	235	255	168	28	130	130	350	640	225	230	512		
7	785	275	275	300	193	35	165	160	385	720	273	280	602		
8	890	275	275	300	193	35	165	160	430	765	273	280	617		
9	925	315	325	370	231	40	175	185	450	845	327	320	697		
10	1025	315	325	380	231	40	175	185	500	895	327	320	697		
11	1105	370	385	430	263	50	190	225	545	1010	342	380	817		
12	1260	370	385	430	263	50	190	225	615	1080	342	380	825		

规格 Size	尺寸 mm Gear units											Dimensions in mm	
	m ₁	m ₃	n ₁	n ₂	s	L ₁	L ₃	L ₄	L ₅	L ₆	D		
4	355	180	105	85	19	490	125	447	137	132	132		
5	430	220	105	100	19	533	125	536	165	140	150		
6	510	220	105	145	19	533	125	536	165	140	150		
7	545	260	120	130	24	636	125	693	210	180	175		
8	650	260	120	190	24	636	125	693	210	180	175		
9	635	320	145	155	28	743	175	674	255	212	190		
10	735	320	145	205	28	743	175	674	255	212	190		
11	775	370	165	180	35	869	225	806	315	265	245		
12	930	370	165	265	35	869	225	806	315	265	245		

规格 Size	尺寸 输出轴			Dimensions in mm Output shaft						润滑油 lubrication		重量 weight	
	B3SH			B3HH		B3DH				KF	B3	KF ⁽¹⁾	B3/KF ⁽²⁾
	d ₂	G ₂	l ₂	D ₂	G ₄	D ₃	D ₄	G ₄	G ₅	(L)	(L)	(kg)	(kg)
4	80	140	170	80	140	85	85	140	205	3	10	50	283
5	100	165	210	95	165	100	100	165	240	3.6	16	66	424
6	110	165	210	105	165	110	110	165	240	3.6	17	66	479
7	120	195	210	115	195	120	120	195	280	6	30	98	689
8	130	195	250	125	195	130	130	195	285	6	33	98	774
9	140	235	250	135	235	140	140	235	330	11.9	45	150	1105
10	160	235	300	150	235	150	150	235	350	11.9	48	150	1235
11	170	270	300	165	270	165	165	270	400	21.5	79	248	1821
12	180	270	300	180	270	180	180	270	405	21.5	84	248	2096

1) KF减速机重量（不含润滑油重量），其余相关数据详见94页；

2) 主减速机与辅传减速机组合总重量（不含润滑油重量）；


1) Weight of gear motor KF (oil weight not included), other detailed data refer to Page 94;

2) Gross weight of combination of main gear unit and auxiliary gear motor (oil weight not included).



三级 Three Stage
类型 Type B3...
规格 Sizes 13...18

B3SH B3HH B3DH

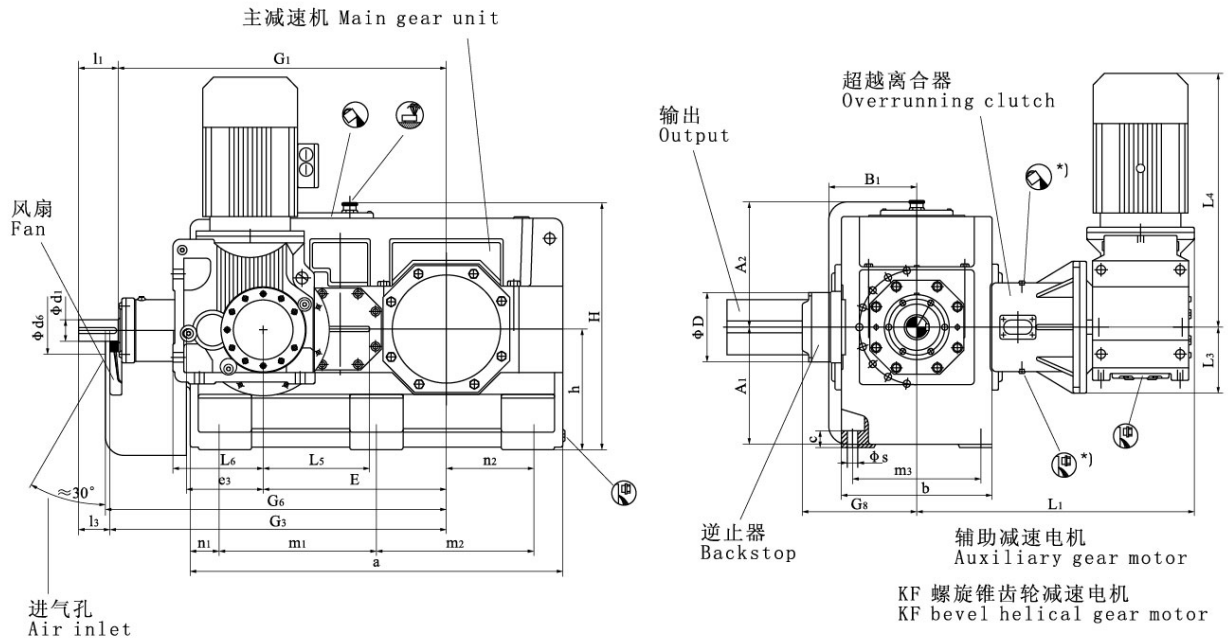

主减速机B布置形式：D

Design of main gear unit B: D

齿轮减速电机KF输出轴方向：A







Output shaft direction of gear motor KF: A

主减速机B布置形式：B

Design of main gear unit B: B


齿轮减速电机KF输出轴方向：B

Output shaft direction of gear motor KF: B




输出轴 Output Shaft


B3SH 实心轴 Solid shaft	
----------------------------	--



B3HH
空心轴
Hollow shaft



B3DH	带胀紧盘的实心轴	Hollow shaft for shrink disk
------	----------	------------------------------

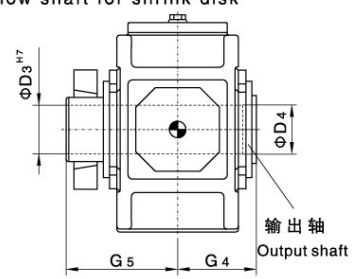



直交轴减速机 Bevel-helical Gear Units
带辅传 With Auxiliary Drive
载荷驱动 Operation Under Load

三级Three Stage
类型Type B3...
规格Sizes 13...18

规格 Size	辅传减速电机 Auxiliary gear motor	尺寸 mm 输入轴 Dimensions in mm Input shaft																				
		i _N =25-45			i _N =25-50			i _N =25-56			i _N =50-71			i _N =56-71			i _N =63-71			G ₁	G ₃	
		d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃	d ₁	l ₁	l ₃			
13	KF107-Y18.5-28.59	85	165	130							70	140	105								1125	1160
14	KF107-Y18.5-28.59							85	165	130								70	140	105	1195	1230
15	KF127-Y30-27.67	95	165	130							75	140	105								1367	1402
16	KF127-Y30-27.67				95	165	130							75	140	105					1413	1448
17	KF127-Y37-27.67	115	205	165							90	170	130								1560	1600
18	KF127-Y37-27.67				115	205	165							90	170	130					1620	1660

规格 Size	尺寸 mm 减速机 Gear units													Dimensions in mm			
	a	A_1	A_2	b	B_1	c	d_6	e_3	E	G_6	G_8	h	H				
13	1290	425	435	550	325	60	210	265	635	1180	453	440	900				
14	1430	425	435	550	325	60	210	265	705	1250	453	440	900				
15	1550	485	520	625	365	70	210	320	762	1420	500	500	1000				
16	1640	485	520	625	365	70	210	320	808	1470	500	500	1000				
17	1740	535	570	690	395	80	230	370	860	1620	532	550	1110				
18	1860	535	570	690	395	80	230	370	920	1680	532	550	1110				

规格 Size	尺寸 mm 减速机 Gear units												Dimensions in mm			
	m_1	m_2	m_3	n_1	n_2	s	L_1	L_3	L_4	L_5	L_6	D				
13	545	545	475	100	305	35	1024	225	934	362	315	290				
14	545	685	475	100	375	35	1024	225	934	362	315	290				
15	655	655	535	120	365	42	1191	275	1048	443	375	310				
16	655	745	535	120	410	42	1191	275	1048	443	375	310				
17	735	735	600	135	390	42	1223	275	1068	513	375	400				
18	735	855	600	135	450	42	1223	275	1068	513	375	400				

规格 Size	尺寸 mm 输出轴 Output shaft									润滑油 lubrication		重量 weight	
	B3SH			B3HH		B3DH				KF	B3	KF ¹⁾	B3/KF ²⁾
	d_2	G_2	l_2	D_2	G_4	D_3	D_4	G_4	G_5	(L)	(L)	(kg)	(kg)
13	200	335	350	190	335	190	190	335	205	35	145	430	3000
14	210	335	350	210	335	210	210	335	240	35	155	430	3350
15	230	380	410	230	380	230	230	380	240	35	230	640	4625
16	240	380	410	240	380	240	240	380	280	55	240	640	4880
17	250	415	410	250	415	250	250	415	285	55	315	690	6140
18	270	415	470	275	415	280	280	415	350	55	325	690	6590

1) KF减速机重量 (不含润滑油重量), 其余相关数据详见94页;

2) 主减速机与辅传减速机组合总重量 (不含润滑油重量);

1) Weight of gear motor KF (oil weight not included), other detailed data refer to Page 94;

2) Gross weight of combination of main gear unit and auxiliary gear motor (oil weight not included).



逆止器 Backstops

标准逆止器布置及输入输出转向关系
Standard backstop arrangement and dependence of direction of rotation

类型 Type	布置形式 Design 规格 Sizes 4 ... 18	
	B	D
B3SH		
B3HH		
B3DH		

型号 Type

规格 Sizes	E mm	G ₈ mm	D mm
4	270	193	132
5	315	225	150
6	350	225	150
7	385	273	175
8	430	273	175
9	450	320	190
10	500	320	190
11	545	397	245
12	615	397	245
13	635	453	290
14	705	453	290
15	762	500	310
16	808	500	310
17	860	540	400
18	920	540	400

